



Data sheet 100C411-53

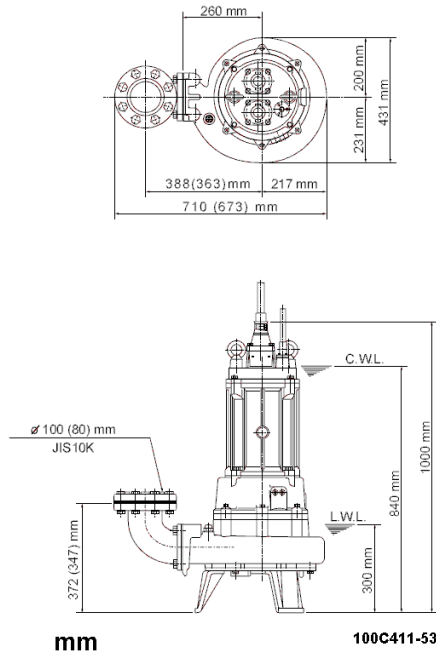

CWL: Continuous running water level
LWL: Lowest running water level

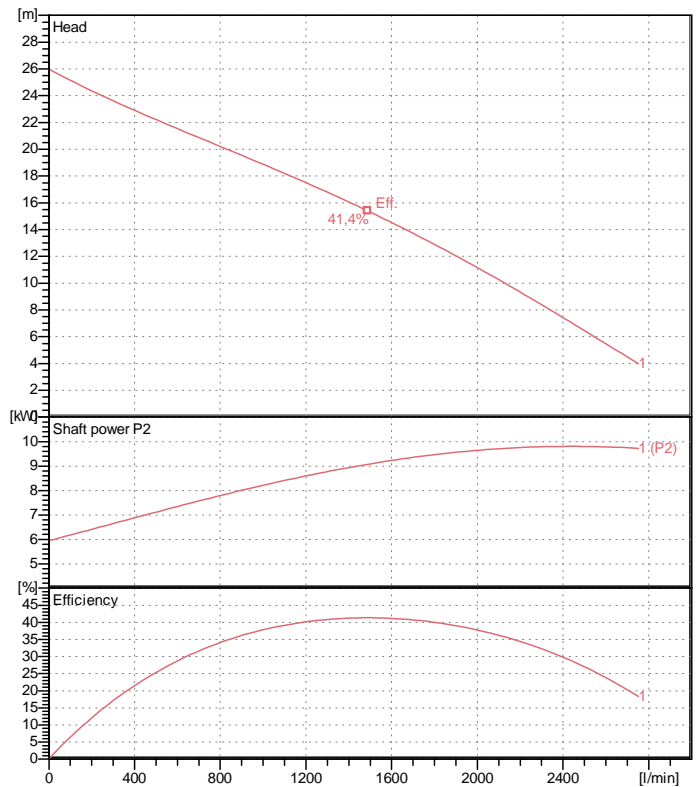

Specification

Electric submersible pump with cutter mechanism
Degree of protection IP 68
Depth of submersion max. 40 m
Type of impeller Single channel impeller
Free passage 50 mm
Suitable for:
sewage water and liquids carrying solids

Electric motor

Dry-type submersible induction motor
Insulation class F 4Poles 1445 1/min
Starting mode Star-delta
Rated voltage 400 V 50 Hz 3~
Power uptake 13,60 kW
Rated power 11,00 kW
Rated current 23,8 A
Start current 128,0 A

Cable

10m H07RN-F 4Cx2,5mm²/ 3Cx2,5mm²/2PNCT 2Cx2mm²

Motor Protection

Miniature protector in windings
(snap-action bi-metal device)

Shaft seal

Double inside mechanical seal in oil bath
additional lubrication by oil lifting device
Primary seal
Silicon carbide on silicon carbide
Secondary seal
Silicon carbide on silicon carbide

Bearings

Shielded ball bearings, maintenance-free

Materials

Impeller
FC20 (EN-GJL-200) + Tungsten carbide
Pump casing FC200 (EN-GJL-200)
Suction cover FCD700 (EN-GJS-700-2)
Motor Frame FC200 (EN-GJL-200)
Shaft Stainless steel SUS403

Discharge size

4" (100mm) JIS 10K screwed-in mating flange
guide rail fitting optional


Weight

184 kg (dry weight of the pump only without cable)



Performance curve

100C411-53

Discharge port	4"
Head	26,0 m
Flow	2751,2 l/min
Rated power	11,00 kW
Power input	13,60 kW
Phases	3~
Voltages	400 V
Frequency	50 Hz
Rated current	23,8 A
Starting current	128,04 A
Number of poles	4
Speed	1445 1/min
Starting mode	Star-delta
Insulation class	F

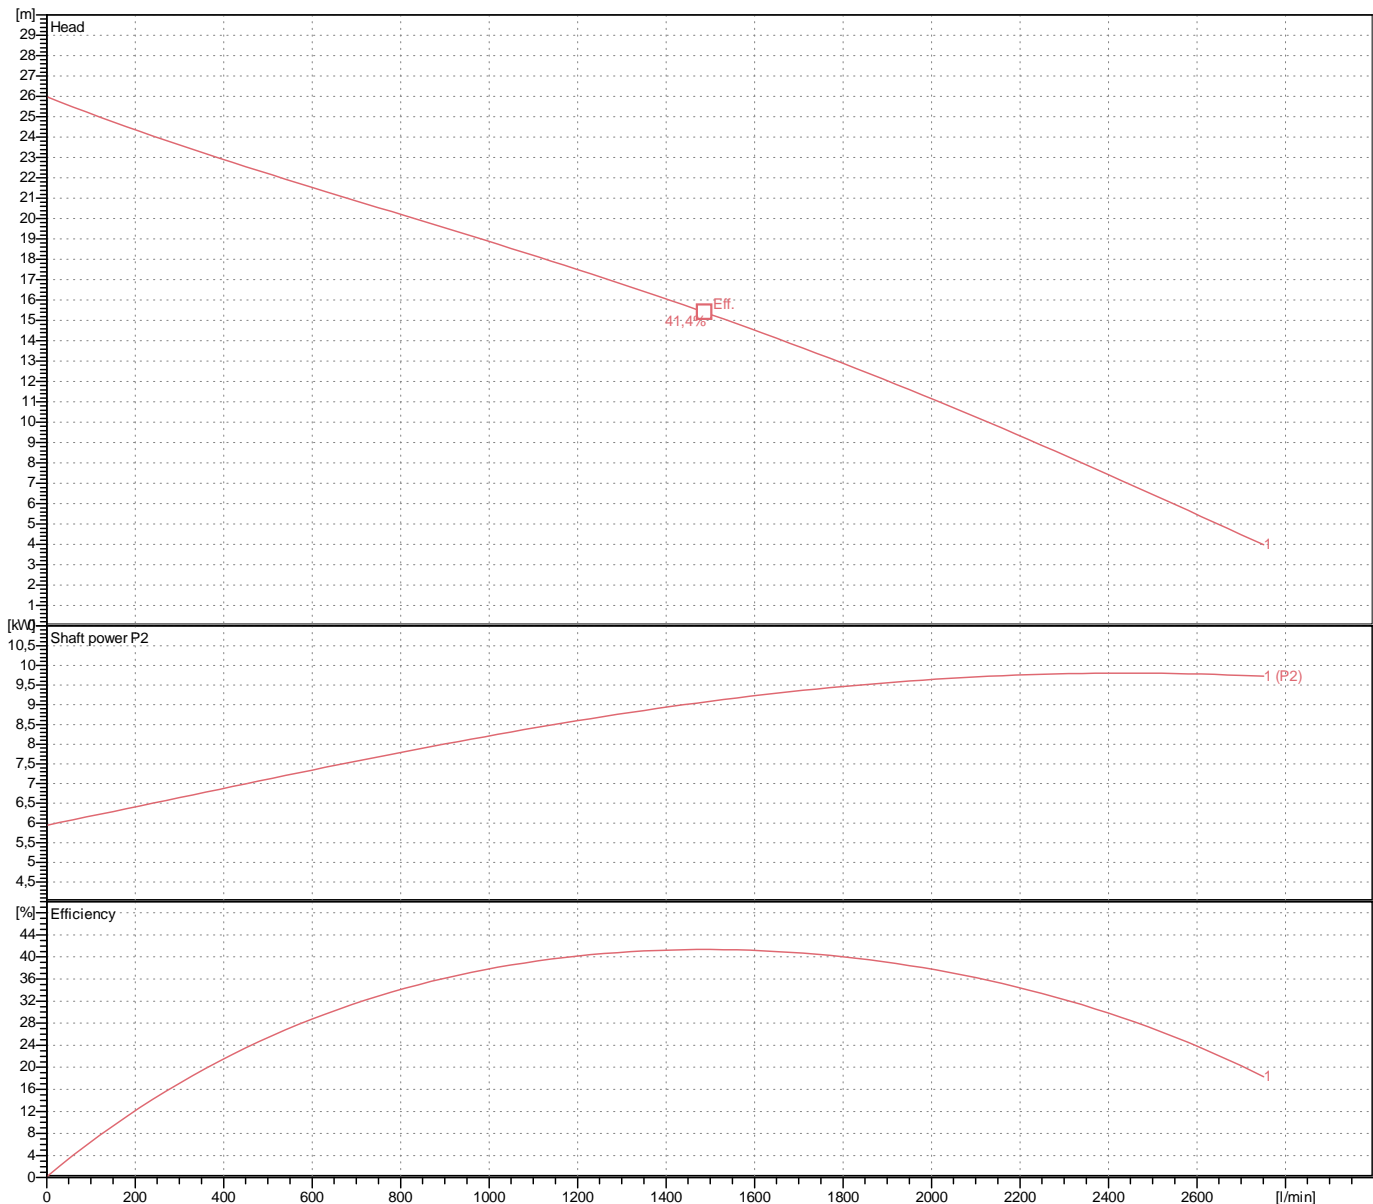

Dimensions 100C411-53

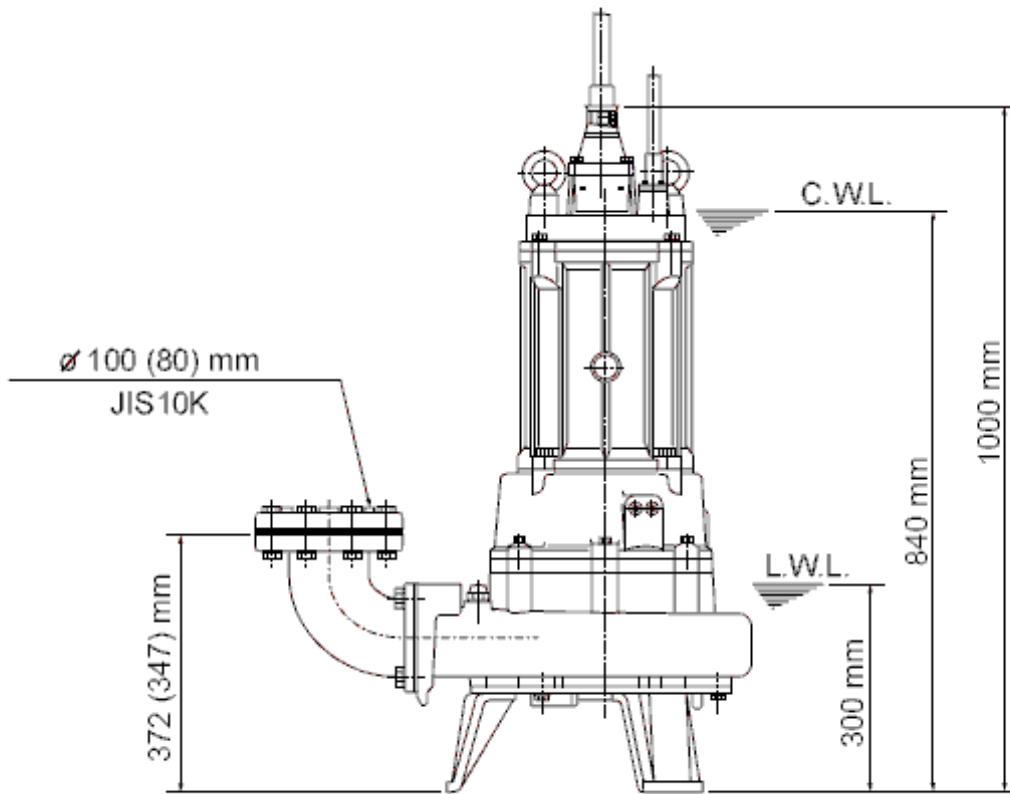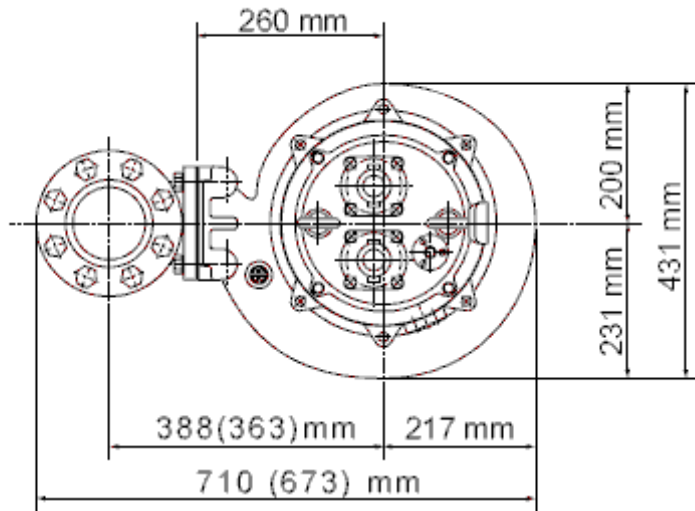

mm

100C411-53


CWL: Continuous running water level
LWL: Lowest running water level

 **TSURUMI PUMP**

Tsurumi Europe GmbH
04.11.2011 V.14/29.09.2011

Heltorfer Str. 14 * 40472 Düsseldorf * Germany
Tel.: +49-211-4179373 sales@tsurumi.eu
Fax: +49-211-4791429 www.tsurumi.eu

Sectional drawing 100C411-53

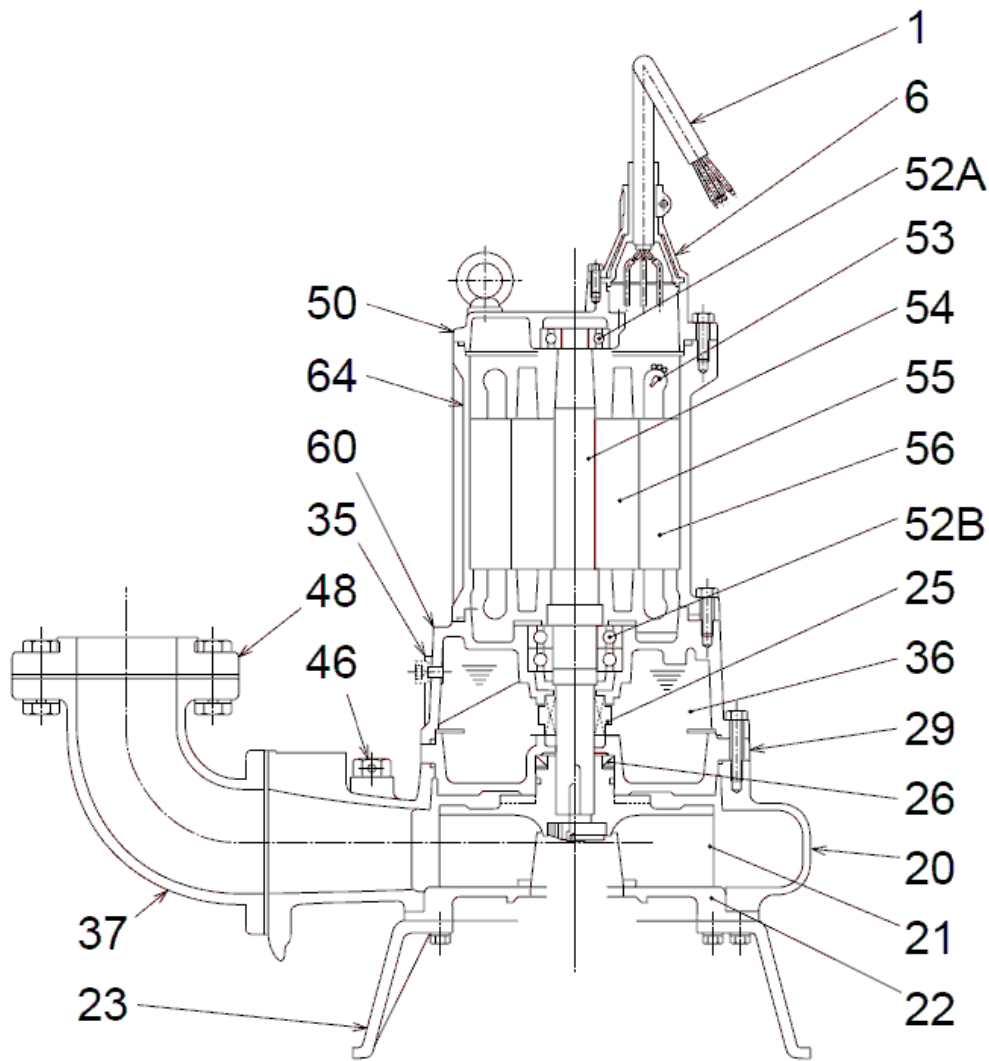

100C411-53

No.	Denomination	Remark	No.	Denomination	Remark
1	Cable (3x)	H07RN-F / 2PNCT-F	52B	Lower bearing	6310ZZD2C3
6	Stuffing box	FC200 (EN-GJL-200)	53	Motor Protector	.
20	Pump casing	FC200 (EN-GJL-200)	54	Shaft	Stainless steel SUS403
21	Impeller	FC20 (EN-GJL-200) + Tungsten carbide	55	Rotor	.
22	Suction cover	FCD700 (EN-GJS-700-2)	56	Stator	.
23	Stand support (3x)	FC200 (EN-GJL-200)	60	Bearing Housing	FC200 (EN-GJL-200)
25	Mechanical seal	H-40	64	Motor Frame	FC200 (EN-GJL-200)
26	Oil seal	TC709212	72	Eye screw (2x)	Construction steel SS400
29	Oil casing	FC200 (EN-GJL-200)			
35	Oil screw (2x)	Stainless steel SUS 1.4031			
36	Lubricant	Turbine oil (ISO VG32)			
37	Discharge bend	FC200 (EN-GJL-200)			
46	Air vent screw	Nylon			
48	Screwed Flange	FC200 (EN-GJL-200)			
50	Motor cover	FC200 (EN-GJL-200)			
52A	Upper bearing	6306ZZC3			