



**D 300 AM  
D 300 AMG**

**D 250 AHG  
D 250 AHGA  
D 350 AHG  
D 400 AHG**



[www.ausa.com](http://www.ausa.com)

**AUSA Center, S.L.U.** ● Ctra. de Vic, Km 2.8 - P.O.B. 194, 08243 Manresa - BARCELONA (ESPAÑA) Tel.: +34 93 874 73 11 E-mail: [ausa@ausa.com](mailto:ausa@ausa.com)

ISO 9001

ISO 14001



(Sede central AUSA-Manresa)

**AUSA Madrid** ● Pol. Ind. Coslada-Marconi 15-17, 28823 Coslada - MADRID (ESPAÑA) Tel.: +34 91 669 00 06 E-mail: [ausa.madrid@ausa.com](mailto:ausa.madrid@ausa.com)

**AUSA France** ● Z. I. Saint Charles-Rue de Zürich, 66000 PERPIGNAN (FRANCE) Tel.: +33 (0) 4 68 54 38 97 E-mail: [ausa.france@ausa.com](mailto:ausa.france@ausa.com)

**AUSA Verkauf & Service Deutschland** ● Heinrich - Welken Straße 5, 59069 HAMM - RHYERN (GERMANY) Tel.: +49 (0) 2385-9359362 E-mail: [ausa.deutschland@ausa.com](mailto:ausa.deutschland@ausa.com)

**BEIJING Rep. Office** ● Address Room 527, HengXiang Building, Tuanjiehu Nanli, Chaoyang District. - Beijing 100026 CHINA  
Tel: 86-10-8597 1983 - Fax: 86-10-8597 1993 - E-mail: [ausa.china@ausa.com](mailto:ausa.china@ausa.com)

**AUSA UK** ● Sales: 07970639988 E-mail: [ausa.uk@ausa.com](mailto:ausa.uk@ausa.com)


**AUSA Northamerica Corp.** ● E-mail: [ausa.corp@ausa.com](mailto:ausa.corp@ausa.com)



**D 300 AM** \_3.000 kg  
**D 300 AMG** \_3.000 kg  
**D 250 AHG** \_2.500 kg  
**D 250 AHGA** \_2.500 kg  
**D 350 AHG** \_3.500 kg  
**D 400 AHG** \_4.000 kg



DIMENSIONS (mm)	D 300 AM	D 300 AMG	D 250 AHG	D 250 AHGA	D 350 AHG	D 400 AHG
A	1873	1852	1503	1695	1852	1866
B	1668	1740	1694	1700	1740	1838
C	1858	1858	1690	1875	1858	1858
E	1487	1506	1500	1540	1506	1590
F	2956	2956	2915	2924	2956	2956
G	398	398	347	363	395	395
H	770	1024	1050	980	1024	1200
I	1932	1932	1920	1920	1932	1950
J	1025	1025	1025	995	1025	1007
K	3792	4120	3975	4000	4120	4353
L	2626	3105	3070	3230	3105	3150
M	330	590	660	590	590	766
N	775	1035	1050	1250	1035	860
T	2770	2770	2705	2705	2770	2770
U	-	327	389	250	327	502
W	1940	1940	1909	1909	1940	1940
X	-	-	-	2300	-	-
Y	-	-	-	2140	-	-
Z	-	-	-	1850	-	-
AA	-	-	-	3830	-	-

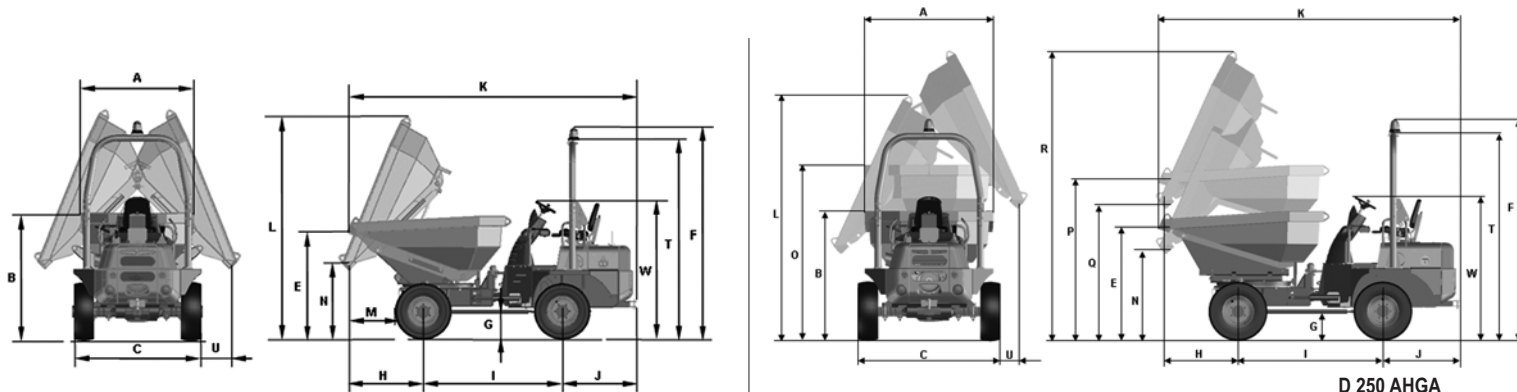

### TECHNICAL SPECIFICATIONS

	D 300 AM	D 300 AMG	D 250 AHG	D 250 AHGA	D 350 AHG	D 400 AHG	
<b>Load capacity (Kg)</b>	3000		2500		3500	4000	
<b>Unloading system</b>	Hydraulic frontal	Hydraulic, 180° rotating		Hydraulic tipping	Hydraulic, 180° rotating		
<b>Chassis</b>	Articulated and oscillating						
<b>Hopper capacities (l)</b>	Water	1325	1050	818	817	1050	
	Levelled	1590	1726	1200	1246	1726	
	Heaped	2067	2737	1910	2063	2737	
<b>Engine</b>	Diesel	Kubota V2203M		Kubota V2203M		Kubota V2403M	
	Power acc./SAE J 1995 (KW/HP)	44.46 / 32.7 (2600r.p.m)		44.46 / 32.7 (2600r.p.m)		49.6 / 36.5 (2600r.p.m)	
	N° of Cylinders	4		4		4	
	Cooling system	Water					
<b>Traction</b>	4 x 4 permanent						
<b>Transmission</b>	Mechanical gearbox. 3 forward gears and 1 reverse. Planetary reduction axles besides differential.			2-speed hydrostatic. Front-reverse direction electro-hydraulic operated. Axles with planetary reduction on differential output			
<b>Engine starting system</b>	Electric						
<b>Speed (max.) (km/h)</b>	22		20		21		
<b>Unladen weight (Kg)</b>	2540	2710	2650	2960	2780	2830	
<b>Gradient negotiable (with full load)</b>	48%		70 %		54%	49%	
<b>Hydraulic circuit</b>	Gear pump of 12 cc. Working pressure 180 bar						
<b>Tyres</b>	Front	11.5/80-15.3 (14 PR)		10,0/75-15.3		11.5/80-15.3 (14 PR)	
	Rear	11.5/80-15.3 (14 PR)		10,0/75-15.3		11.5/80-15.3 (14 PR)	
<b>External turning circle</b>	4680		4225	4330	4680	4720	
<b>Steering</b>	Hydraulic Working pressure 110 bar						
<b>Tank capacity (l)</b>	Fuel	44					
	Hydraulic fluid	40					
<b>Service brake</b>	Oil-immersed, multidisc, hydraulically operated						
<b>Parking brake</b>	Oil-immersed, multidisc, mechanically operated						

### STANDARD EQUIPMENT

Foldable ROPS arch
Anti vandal system
Ergonomic seat
Seat belt
Rotating beacon
Audible reverse warning

### OPTIONAL EQUIPMENT

Lighting equipment