


PARAMETERS

Model	GTJZ1623D
Dimensions	
Platform height max.	16.2 m
Working height max.	18.2 m
Platform Length-Extended	1.5 m/1.2m
Length - stowed	4.88m
Width - stowed	2.27m
Height - Rails Folded	2.47 m
Height - Rails Unfolded	3.15 m
Wheelbase	2.84 m
Ground clearance	0.36 m
Platform size (L*W*H)	3.98 m*1.83 m*1.1 m
Productivity	
Max. platform occupancy	4
Lift capacity	680 kg
Lift capacity—Extendede	227 kg
Drive speed - stowed	0~6.1 km/h
Drive speed - raised	0~1.1 km/h
Gradeability	40%
Turning radius - inside	2.2 m
Turning radius - outside	5.3 m
Tire Type	12x33-20/ solid
Power	
Power source	Diesel
Hydraulic tank capacity	140L
Hydraulic system capacity	147L
Fuel tank capacity	110L
Control voltage	12VDC
Drive mode	4WD×2WS
Hydraulic pressure	24Mpa
Weight	
Overall weight	8780kg
Standards Compliance	
CE/ ISO/ ADR/ ARAMCO	

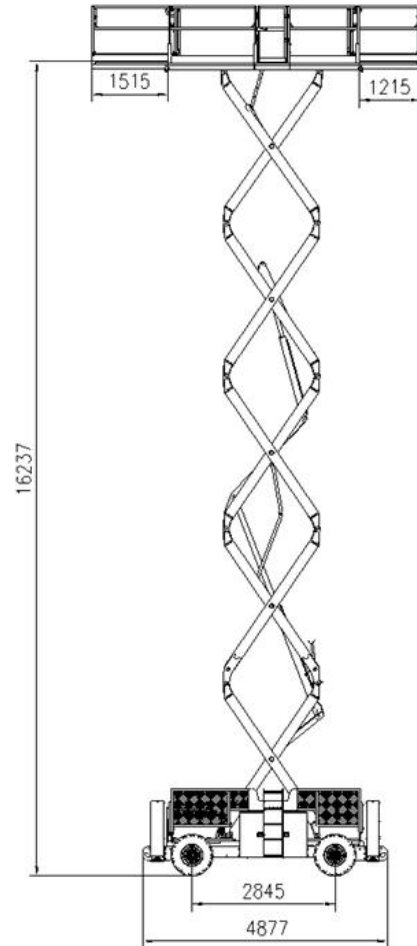

- * The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
- ** Gradeability applies to driving on slopes.
- *** Weight will vary depending on options and/or country standards.

Hunan Sinoboom Heavy Industry Co., Ltd.

Address: No.128, East Jinzhou Avenue, Ningxiang High-tech industrial park, Changsha, Hunan, China

Tel: +0086-731-87116222

Email: sales@sinoboom.com

Website: www.sinoboom.com