





## Still more possibilities - 1501.


The 1,500 kg payload and optional swivel tipping skip enhance the range and variety of the dumper's applications. Even in very confined spaces, materials can be dumped precisely.

- High-tipping skip (1.45 m dumping height); optional swivel tipping skip, maximum payload 1,500 kg.
- Hydrostatic twin-lock four-wheel drive.
- Continuously variable speed up to 16 km/h max.
- Large service and maintenance access.
- Clearly laid out instrument panel and wide, robust leg protection.

## **1501 Technical specifications**

	High tip skip	Swivel tip skip
Operating data		
Payload kg	1,500	1,500
Shipping weight kg	1,320	1,261
Skip capacity level I	650	650
Skip capacity heaped I	800	800
Engine / Motor		
Engine / Motor manufacturer	Yanmar	Yanmar
Engine / Motor type	3TNV76	3TNV76
Engine / Motor	Diesel	Diesel
Engine performance acc. to ISO 3046/1 kW	17	17
Displacement cm <sup>3</sup>	1,116	1,116
Engine RPM rpm	3000	3000
Travel speed km/h	16	16
Articulation angle °	33	33
Pendulum angle °	15	15
Turning radius mm	3,300	3,300
Gradeability %	50	50
Tires	10.00/75-15	10.00/75-15
LxWxH mm	3300 x 1305 x 2550	3220 x 1305 x 2550
Steering pump	axial piston pump	axial piston pump
Flow rate I/min	135	135
Operating pressure bar	360	360
Duty pump	gear pump	gear pump
Flow rate I/min	25	25
Operating pressure bar	170	170
Fuel tank capacity	20	20
Sound level (LwA) dB(A)	101	101

## **1501 Dimensions**

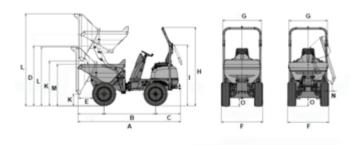

		High tip skip	Swivel tip skip
Α	Overall length	3,300 mm	3,220 mm
В	Wheelbase	1,650 mm	1,700 mm
С	Rear overhang	810 mm	810 mm
D	Height	1,885 mm	
E	Dumping distance	400 mm	280 mm
F	Width	1,350 mm	1,305 mm
G	Skip width	1,225 mm	1,260 mm
Н	Height ROPS	2,550 mm	2,550 mm
I	Height ROPS tipped	1,960 mm	1,960 mm
K	Dump height max.	370 mm	680 mm
K	Dump height max. High tip skip raised	1,450 mm	
L	Skip height tipped	1,895 mm	2,250 mm
L	Skip height High tip skip raised	2,975 mm	
М	Skip height	1,345 mm	1,300 mm
N	Dumping distance lateral		100 mm
0	Ground clearance	260 mm	260 mm

Please note: that product availability can vary from country. It is possible that information / products may not be available in your country. More detailed information on engine power can be found in the operator's manual; the stated power may vary due to specific operating conditions. Subject to alterations and errors excepted. Applicable also to illustrations.

Copyright © 2019 Wacker Neuson SE.